RESTRICTED.

1. Chrany

The information contained in this Report is not to be communicated, either directly or indirectly, to the press or to any person not authorised to receive to

C.I. AMN. TECHNICAL REPORT

O. 22 (SECOPIDISSUE)

This Supersedes the First Issue which should now be destroyed.

JAPANESE AMMUNITION

C.I.AMN. TECHNICAL REPORTS

REPORT NO. 22 (S OND ISSUE)

AUGUS 1945

JA NES PIS L'AND NACH L'CAR NE AMMUNI ON.

ENERA

Although reports have mentioned calibres of 7-mm., 7.62-mm. etc. for pistols and machine carbines only two calibres of ammunition are believed to be standard and in general use in Japanese revolvers, S.L. pistols and machine carbines. Both these cartridges have been examined at Kirkee and this report is intended to give a detailed description of them. They are:

- S.L. (semi-automatic) pistols and machine
- b, A ! nm. imm d cartrige for use in pistol revolvers
- 2. Before descriping these cartridges it will be useful to mention briply the various weapons in which they are used.
- 3. The 8-mm (Nambu) semi-rimless cartridge is used in:-

(a) 8-mm. S.L. (semi-automatic) pistol, Nambu Type:

This is med fter its designer, colonel K iro
Namou Al hour it resembles the rman Lugar
pistol it is o Japanese origin and the mechanism
is different. This was formerly be standard
pistol of the partie Army to was superseded by
the 14th Year ope (Taisho 14) (1926). The Nambu
pistol weighs out 2-lbs. and has an eight round
box magazine in butt grip. The muzzle velocity is
of the order of 950 f.s.

(b) 8-mm. S.L. (semi-automatic) Pistol Type Taisho 14, (1926):-

This weapon supersedes the Nambu type pistol and although in appearance it resembles the German Luger its mechanism follows the lines of the German Mauser and the Italian Glisenti military semi-automatic pistols. It weighs about 2.2-lbs. and has an eight round box magazine in the butt grip. The muzzle velocity is the same as for the Nambu type pistol.

(c) 8-mm. S.L. (semi-automatic) Pistol, Type '94 (1934):-

This is a latest design of Japanese pistol and is much lighter than previous designs weighing only 23 3/4-ozs with the magazine empty, and 26-czs. with the magazine filled. The barrel is slightly shorter and for this reason the Muzzle Velocity is slightly less, of the order of f.s. The oxtype magazine in the cutt grap holds six rounds.

(d) 8-mm Machine Carbine Tyre '00 or 100 (1940)

This is a light blow ack a r-cooled automatic carbine, which appears to be issued in two types. One type has a one piece stock and fore-end while the other has a folding stock for use by paratroops. The latter is provided with a light bipod similar to that used on the Fimish Suomi carbine. The muzzle velocity is reported to be of the order of 1100 f.s.

DESCRIPTION

8-mm. (Nambu) Semi-rinless Cartridge:-

This crtridge with its of le-necked semi-rimess case of a unusual design is not used by any other country lives be nearly the 7.65 mm. (.30-in Luger casteringe, but is considerably larger with a slightly heaver built. The general appearance of this cartridge and the details of construction are given in the Plate. The round follows orthodox practice, the case being made of solid drawn carbridge brass with a semi-rimless base. At the mouth the case is necked down more than is usual with cartridges of this nature, thus giving it a bottle neck appearance. The percussion cap is of brass and is a Berdan type secured in the case by pressing in. No base or other markings are used.

The bullet is full jacketed with a lead alloy core and a cupronickel envelope, the weight being 100 grains. The propellant charge consists of about 4.6 grains of small pillow-shaped N.C. grains which fill the case to capacity. These are of two distinct colours, one being ash coloured and the other pale yellow. Details of this propellant are given under Chemical Analysis below. The velocity of this cartridge is of the order of 1000 f.s. in a short barrelled pistol and up to nearly 1100 in the longer barrelled machine carbine.

9-mm. Rimmed Cartridge:-

Smith & Wessen revolver cartridge, but the case is approximately .1-in. longer. Its manufacture follows orthodox practice, a solid drawn case with a Berdan type per ussion cap made of brass, which is secured in the case by pressing in. It has a solid lead unjacketed bullet weighing 150 cs. with a probable charge of about speaked for some leading of a smaller greenish growth appeal of the case up to about one third charge of the seated in the case up to about one third charge of the seated in the case of the amiliary of the saturation of this cartride will be charged and. The energy of the markings are used.

(Economic, manufacture and development aspects)

The 8-mm. cartridge is a comparatively old cartridge and the design has been based most likely on the 7.65-mm. Luger cartridge. The fat case enables a large propellant charge to be used although the weight of the bullet is only about 4 grains nore than the bullet of the 7.65-mm. Luger cartridge. The velocity is, therefore, reater and the Nambu pistol was originally desired to take a shouller stock and sighted up to about 600 yards (500 metres).

The continued use of ar unjacketed pistol revolver bullet by the Japanese in this war is worthy of attention in view of the strong objections raised by the Germans and Italians to our use of unjacketed bullets in .455-in. or .380-in. cartridges.

- 8. It is interesting to note that this cartridge is peculiar to the Japanese and so far as is known is not used by any other Power.

Functioning and Performance.

- 10. Only a few 8-mm. cartridges have been received and it has not been possible, therefore, to carry out any trials to determine muzzle velocity, accuracy and functioning performance of the ammunition.
- 11. The 9-mm. cartridge fits the .380-in. British Service (Webley) No.2 revolver, and functioning in this weapon is normal. In this revolver the cartridge gave a mean observed velocity at 30 ft. of 517 f.s. Using the Type Meiji 26

revolver a mean observed velocity at 30 ft. of 580 f.s. was obtained. Small firing trials were carried out but with the few rounds available it was found that the Type 26 revolver throws about one foot high at 50 yards and two feet high at 20 yards. The reason for this is not clear as the sighting did not appear to have be interfered with.

> TC-T CH of Military Explosives, Kirce) (Chie Inspect

12. opellant Charge

Size and shap Flakes coalesced at the edges and bulged at the centre, 0.05" X 0.05" X 0.04".

Colour Two different colours noticeable: -(i) ash coloured. (ii) Pale yellow.

C. r volatile matter Composition 95.2 phenylamine 4.8

-mm.

Size and shape Approximately rhombic pellets bulged out in the centre (pillow-shaped), 0.07" X 0.07" X 0.03".

Colour

Greenish grey.

Composition

N.C. + volatile matter 96% Ether soluble mostly) 4% Diphen

28.0

48.6%

rcury fulminate

Potassium chlorate

.3. Cap Composition.

	Antimo v svi nide Potassium conlorate	21.6
9-mm.	- Mercury fulminate An ti mony sulphide	29.4% 22.0%

-mm.

PACKING

14. 8-mm.:- No details of packing are available at present.

15. 9-mm.:- 50 rounds are packed in a cardboard carton measuring 4" X 2" X 5/4". A white paper label printed in black is pasted on the carton to indicate the type of revolver, nature and quantity of contents. The inspection mark is in the centre of the label. Details of this carton are shown in the Plate.


SUMMARY OF DATA


	8-mra.	9-mm.
16. Complete round.		
Length overall Weight	1.24-in. 159 grains.	1.19-in 203 grains.
Type	Jacketed ball: lead alloy core in cupronickel, envelope.	Unjecketed ball: lead alloy bullet.
Length Diameter Weight	0.59-ins. 0.32-ins. 100 grains	0.632-ins. 0.354-ins. 150 grains.
Cartridge Case.		
Type Material Length Diameter	Semi rirless. Solid drawn brass. 0.84-ins	Rimmed. Solid drawn brass 0.85-ins
over rim. Weight	0.413-ins. 52 grains.	0.43-ins. 50 grains.
Propellant.		
Charge	N.C. 4.63 grs.	N.C. 2.9 grs.
Percussion Cap.		
Material Diameter Weight cap filled. Weight of cap composi-	Berdan. Brass. 0.179 ins. 1.69-grs	Berdan. Brass. 0.19-ins. 1.67-gr
tion.	0.12-grs.	0.5-grs.

· i


CHIEF INSPECTORATE OF AMMUNITION, INDIA, KIRKEE.

SECOND ISSUE, 30TH AUGUST 1945.

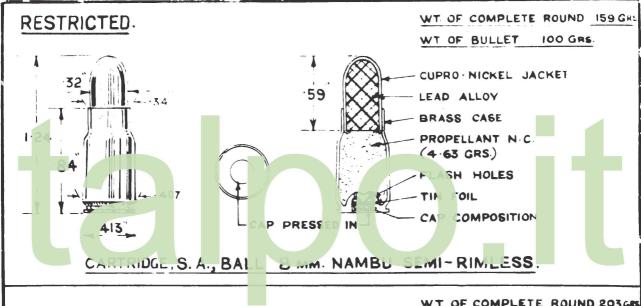

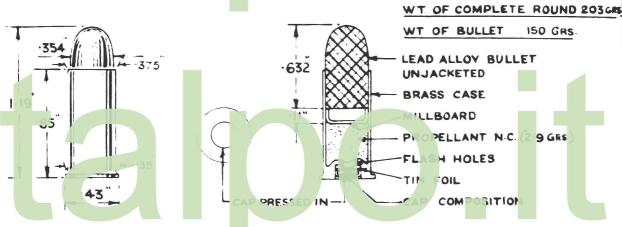

CARTRIDGE, S.A., BALL, (S&W. TYPE) 9 MM. RIMMED.

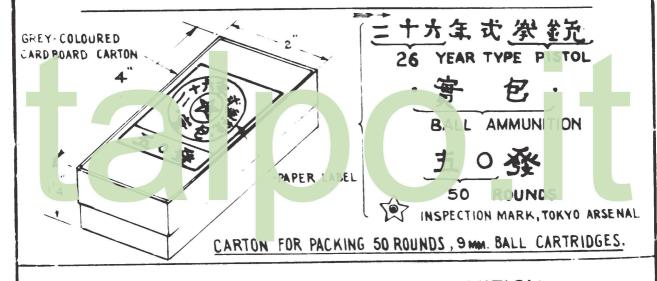

PISTOL & MACHINE CARBINE AMMUNITION.

CHAMM 5/1224 KIRKEE, AUG 45